



# Osmose Guide to the Hazard Class System & **TIMBER PRESERVATION** options in Australia

### Hazard Class 1 - ABOVE GROUND

**Conditions:** Completely protected from the weather and well-ventilated.  
**Biological Hazard:** Lyctid borers.  
**Examples:** Susceptible framing, flooring, furniture and interior joinery.

### Hazard Class 2 - ABOVE GROUND

**Conditions:** Protected from wetting.  
**Biological Hazard:** Borers including termites.  
**Examples:** Framing, flooring and similar, used in dry situations.

### Hazard Class 3 - ABOVE GROUND

**Conditions:** Subject to periodic wetting.  
**Biological Hazard:** Moderate decay fungi, borers and termites.  
**Examples:** Weatherboard, fascia, pergola's (above ground), window joinery, framing, decking and laminated verandah posts.

**PLEASE NOTE:**

The illustration on this page is not a specification guide; its purpose is to depict the various treated timber Hazard Classes as noted in AS1604.

The Blue colour shown on some of the internal framing depicts "Blue" termite resistant timber framing treated with DeterMite. "Blue" termite resistant timber framing is restricted for use South of the Tropic of Capricorn only. The "Red" looking internal timber depicts framing treated with PROTIM LOSP H2.


### Hazard Class 2(F) - ABOVE GROUND

Conditions and Biological hazard as for H2 although approved for use South of the Tropic of Capricorn only. Example: Framing (envelope treatment).

### Hazard Class 2(S) - ABOVE GROUND

Conditions and Biological hazard as for H2 although approved for use South of the Tropic of Capricorn only. Example: LVL/plywood (glue-line treatment).

## Guide to the Australian Hazard Class System

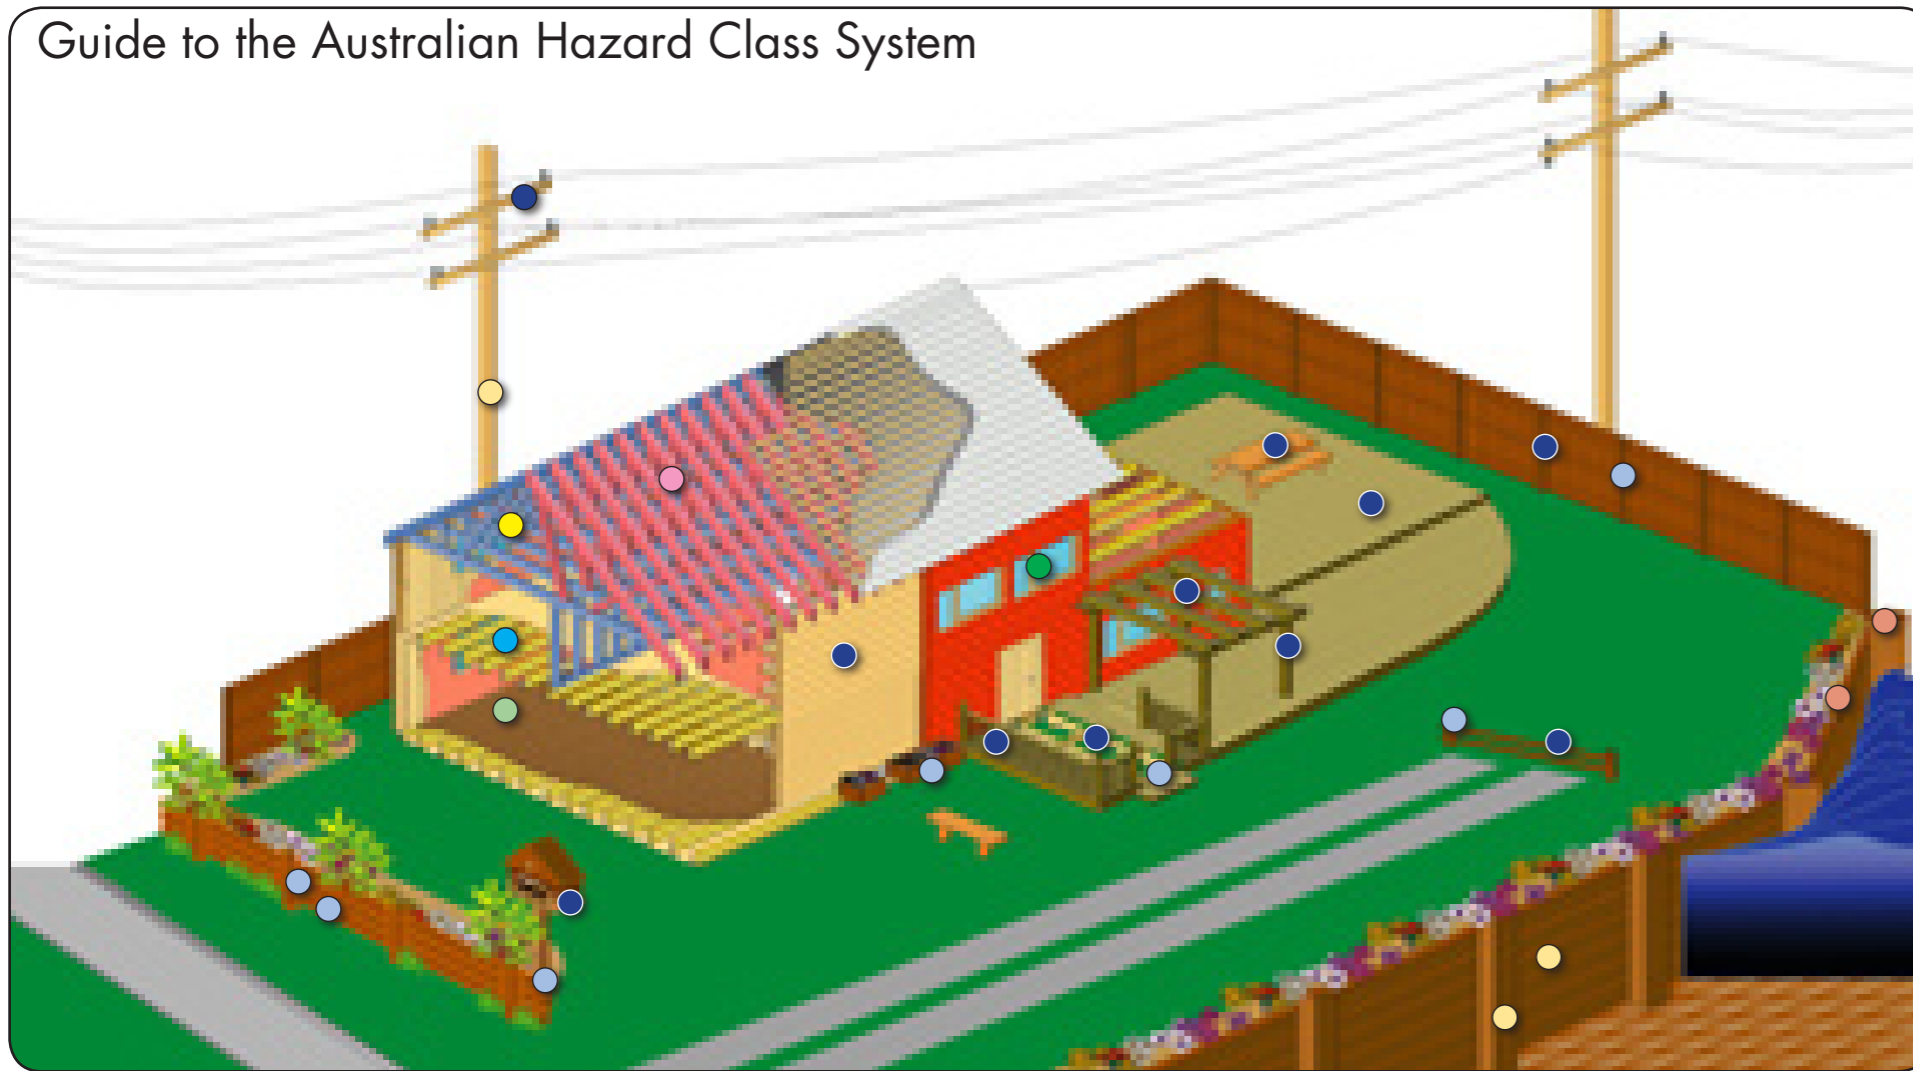

Hazard Class	Approved Osmose Preservative Systems (see back page for details)								
	CCA	ACQ®	Protim® H1	Protim® H2	Protim® H3	Protim® Optimum™	DeterMite® H2F/H2S	Inshield™	Liquid Boron™
H1	✓	✓	✓	✓	✓	✓		✓	✓
H2	✓	✓		✓	✓	✓		✓	
H2F							✓		
H2S							✓		
H3	✓	✓			✓	✓			
H3A**	✓	✓			✓				
H4	✓	✓							
H5	✓	✓							
H6	✓								

Note: Please refer to the complete standards for more detailed information. \*\*as per AS1604 and NSW TMA

### Hazard Class 3(A)\*\* - ABOVE GROUND

**Conditions:** Products predominantly in verticle exposed situations and intended to have the supplementary paint coat system that is regularly maintained.  
**Biological Hazard:** Moderate decay fungi, borers and termites.  
**Examples:** Fascia, barge boards, exterior cladding, window joinery, door joinery and non-laminated verandah posts.

### Hazard Class 4 - IN GROUND









**Conditions:** Subject to severe wetting.  
**Biological Hazard:** Severe decay fungi, borers and termites.  
**Examples:** Fence posts, garden walls less than 1mm high, greenhouses, posts and landscaping timbers.

### Hazard Class 5 - IN GROUND

**Conditions:** Subject to extreme wetting and/or where the critical use requires a higher degree of protection.  
**Biological Hazard:** Very severe decay fungi, borers and termites.  
**Examples:** Retaining walls, piling, house stumps, building poles and cooling tower fill.

### Hazard Class 6 - MARINE EXPOSURE

**Conditions:** Subject to prolonged immersion in sea water.  
**Biological Hazard:** Marine wood borers and decay fungi.  
**Examples:** Boat hulls, marine piles, jetty cross-bracing, landing steps and similar.

Preservative System	Key Features	Key Benefits	Limited Guarantee*
<b>LifeWood CCA** (H1-H6)</b> Chromated copper arsenate	<ul style="list-style-type: none"> <li>- Water carrier.</li> <li>- Proven durability in harshest conditions.</li> <li>- Fungicide and Insecticide.</li> </ul>	<ul style="list-style-type: none"> <li>- Reliability &amp; confidence.</li> <li>- Proven resistance to fungal decay and insect attack.</li> </ul>	50 years 
<b>NatureWood ACQ (H1-H5)</b> Alkaline copper quat	<ul style="list-style-type: none"> <li>- Copper based preservative.</li> <li>- Water carrier.</li> <li>- Long term protection in hazard classes H1- H5.</li> <li>- Fungicide and Insecticide.</li> </ul>	<ul style="list-style-type: none"> <li>- Alternative system for above and below ground contact.</li> <li>- Proven durability.</li> <li>- Proven resistance to fungal decay and insect attack.</li> </ul>	50 years 
<b>Protim LOSP H1</b> Permethrin	<ul style="list-style-type: none"> <li>- Light Organic Solvent Preservative.</li> <li>- Insecticide.</li> </ul>	<ul style="list-style-type: none"> <li>- Ideal for preservation of timber where kiln dried product of exacting dimensions is required.</li> <li>- Proven resistance to insect attack.</li> </ul>	25 years 
<b>Protim LOSP H2</b> Permethrin	<ul style="list-style-type: none"> <li>- Light Organic Solvent Preservative.</li> <li>- Insecticide.</li> </ul>	<ul style="list-style-type: none"> <li>- Ideal for preservation of timber where kiln dried product of exacting dimensions is required.</li> <li>- Proven resistance to termite attack.</li> </ul>	25 years 
<b>Protim LOSP H3</b> TBTN + Permethrin  <b>Protim Optimum (H3)</b> Propiconazole + Tebuconazole + Permethrin	<ul style="list-style-type: none"> <li>- Light Organic Solvent Preservative.</li> <li>- Fungicide and Insecticide.</li> </ul>	<ul style="list-style-type: none"> <li>- Ideal for preservation of timber where kiln dried product of exacting dimensions is required.</li> <li>- Proven resistance to fungal decay and insect attack.</li> </ul>	25 years 
<b>DeterMite (H2F/H2S)</b> Bifenthrin	<ul style="list-style-type: none"> <li>- Water carrier.</li> <li>- Spray or glue line.</li> <li>- Repellency effect.</li> <li>- Insecticide.</li> </ul>	<ul style="list-style-type: none"> <li>- Proven performance South of the Tropic of Capricorn.</li> <li>- Proven resistance to termite attack.</li> </ul>	25 years 
<b>Inshield (H1-H2)</b> Permethrin	<ul style="list-style-type: none"> <li>- Water carrier.</li> <li>- Clear colour.</li> <li>- Insecticide.</li> </ul>	<ul style="list-style-type: none"> <li>- Ideal for preservation of high value timber flooring.</li> <li>- Proven resistance to insect attack.</li> </ul>	
<b>Liquid Boron (H1)</b> Boron	<ul style="list-style-type: none"> <li>- Water carrier.</li> <li>- Fungicide and Insecticide.</li> </ul>	<ul style="list-style-type: none"> <li>- Proven resistance to insect attack (excluding termites).</li> </ul>	

\* See separate limited guarantee document for more details.

\*\* **Please note:** CCA treated timber has some limitations to its use within the Australian market. CCA treated timber cannot be used for garden furniture, picnic tables, exterior seating, children's play equipment, patio and domestic decking, and hand rails. Alternative treatments such as NatureWood ACQ® and Protim® Optimum are registered for use in these applications. Osmose recommend either of these preservative options as suitable alternatives.

**Osmose Australia**  
**Customer Support 1 800 088 809**  
**www.osmose.com.au**

Osmose®, Lifewood®, NatureWood®, ACQ®, DeterMite®, Inshield™ and Liquid Boron™ are trademarks of Osmose, Inc. or its subsidiaries. Lifewood, NatureWood and PROTIM treated timber products are produced by independently owned and operated wood preserving facilities. DRAFT © 2007 Osmose Australia. For important information on all of our Preservative Systems refer to [www.osmose.com.au](http://www.osmose.com.au).